


ENVIROSUN[®]

CF Endless Series continuous flow gas water heater

*Endless hot water on demand.
Engineered for efficiency.*

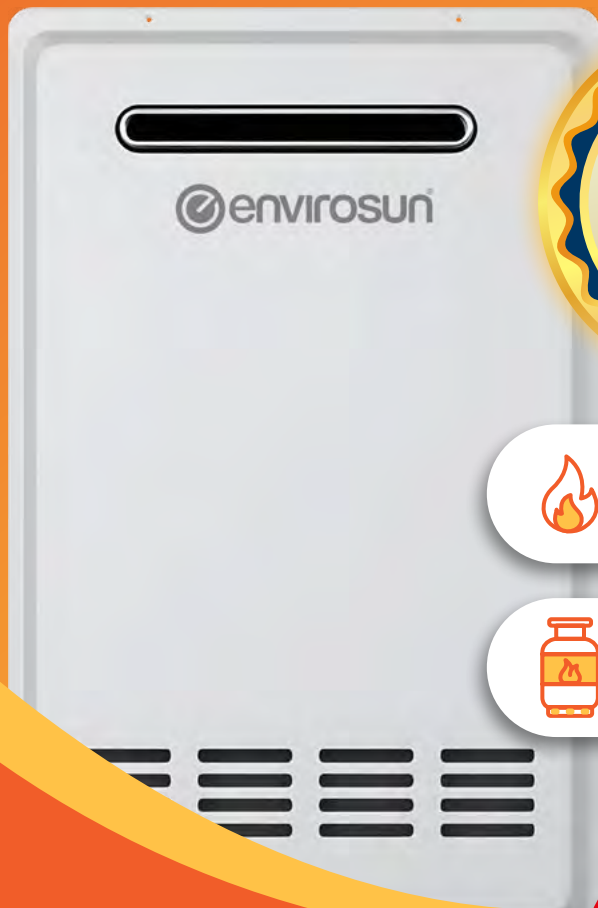

AUSTRALIA AND NEW ZEALAND
GAS SAFETY CERTIFICATION



Lead Free

WM-032235
AS 3498



GasMark

IAPMO

GMK10805
AS/NZS 2712:2007



**FlameSustain™
Technology**



**Available in
Natural Gas & LPG**



Right here for Aussie homes
- with quality and value.



www.energyrating.gov.au

Hot water the moment you need it. Every time.

The Envirosun® Endless Series is a continuous flow gas water heater - no storage tank, no waiting, no running out. Cold water enters, gas fires instantly, hot water flows. The moment you turn off the tap, it stops - no energy wasted, simple, reliable.



FULLY CERTIFIED, FULLY PROVEN

Independently verified and compliant with Australian Standards WaterMark WM-032235 and GasMark GMK10805.



6.2-STAR ENERGY RATING - EFFICIENT BY DESIGN

Independently verified as one of the lowest running costs in its class. Heating water only when you need it, there's no energy wasted keeping a tank warm.



BUILT-IN SAFETY - MULTIPLE LAYERS OF PROTECTION

Dual CPU protection and an intelligent self-check system for continuous performance monitoring. Built-in protections include flameout, gas circuit, overcurrent, overheating, anti-freeze, blocked ventilation, temperature lock, and 60-minute continuous use shutdown.



FLAMESUSTAIN™ - STABLE PERFORMANCE IN ANY CONDITIONS

FlameSustain™ tech keeps combustion steady even when conditions aren't - eg low gas pressure, reduced water flow or high winds. Hot water stays on - no cold surprises mid-shower.



WATERSERVO - PRECISE TEMPERATURE, LESS WASTE

WaterServo tech gets hot water to the tap faster and keeps the temperature locked in through precise flow control - less waiting, less water wasted. Temperature is adjustable from 38°C to 75°C.



RIGHT FOR EVERY HOME

Available in Natural Gas and LPG models across two flow rates to suit a range of household demands: 20L/min for 2-4 people and 26L/min for 4-6 people.

Australia's best warranty coverage



RESIDENTIAL USE

Heat Exchanger	10 years parts warranty	2 years labour warranty
----------------	-------------------------	-------------------------

COMMERCIAL USE

Heat Exchanger	3 years parts warranty	1 year labour warranty
All other components	1 year parts warranty	1 year labour warranty

Parts warranty to original owner/occupier only. Other residential owners limited to 5 years warranty.

Warranties start from original install date. If install date unknown, assumed to be 6 months post build date.

For detailed warranty terms and condition please refer to the product user manual.

Envirosun® Endless Series specifications

	ES20CF-2-NG	ES26CF-2-NG	ES20CF-2-LPG	ES26CF-2-LPG
Gas type	Natural Gas	Natural Gas	LPG*	LPG*
Household size	2-4 people	4-6 people	2-4 people	4-6 people
Flow rate	20 L/min	26 L/min	20 L/min	26 L/min
Gas consumption	160 MJ/h	195 MJ/h	160 MJ/h	195 MJ/h
Heat output	37 kW	47 kW	37 kW	47 kW
Gas inlet pressure	1.13-5.0 kPa	1.13-5.0 kPa	2.0-3.5 kPa	2.0-3.5 kPa
Test point pressure	580/150 Pa	800/150 Pa	920/320 Pa	1600/320 Pa
Injector diameter	Ø2.15mm	Ø2.15mm	Ø1.3mm	Ø1.3mm
Number of injectors	13	13	13	13
Burner control segment	7, 2, 4	7, 2, 4	7, 2, 4	7, 2, 4
Water pressure max	1,000 kPa	1,000 kPa	1,000 kPa	1,000 kPa
Water pressure min	150 kPa	150 kPa	150 kPa	150 kPa
Activation flow rate	2.3 L/min	2.3 L/min	2.3 L/min	2.3 L/min
Running flow rate	1.7 L/min	1.7 L/min	1.7 L/min	1.7 L/min
Relief valve setting	1.0-1.5 MPa	1.0-1.5 MPa	1.0-1.5 MPa	1.0-1.5 MPa
Electrical rating	48W	66W	48W	66W
Anti-freezing capacity	100W	100W	100W	100W
Ingress protection	IPX4	IPX4	IPX4	IPX4
Power supply	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
Ignition	Direct without pilot	Direct without pilot	Direct without pilot	Direct without pilot
CER code	AS315/40/O/GR26/ E20HS-DM	AS400/40/O/GR26/ E20HS-DM	AS400/60/O/GR26/ E20HS-DM	AS400/60/O/GR26/ E20HS-DM
Gas inlet connection	G ³ / ₄	G ³ / ₄	G ³ / ₄	G ³ / ₄
Water connection	G ³ / ₄	G ³ / ₄	G ³ / ₄	G ³ / ₄
Net/gross weight	19.7/22.2 kg	19.7/22.2 kg	19.7/22.2 kg	19.7/22.2 kg
Product dimensions	590 × 370 × 210mm	590 × 370 × 210mm	590 × 370 × 210mm	590 × 370 × 210mm
Package dimensions	712 × 425 × 298mm	712 × 425 × 298mm	712 × 425 × 298mm	712 × 425 × 298mm
GasMark approval	GMK10805	GMK10805	GMK10805	GMK10805
WaterMark approval	WM-032235	WM-032235	WM-032235	WM-032235

Talk to us today and see why Australia's smartest plumbers recommend **Envirosun**.

 1300 046 893

 info@energiegroup.com.au

 envirosun.au

Envirosun is part of Energie Group Australia



Australia's largest independent hot water brand with 35 years designing products for local conditions using the world's best components.

A division of Energie Group Australia Pty Ltd, ABN 50 166 500 787

Scan to register
your warranty

